

Complete range on
Swiss cut solutions

palbit
HARDMETAL TOOLS SOLUTIONS

NEW

SAL
Swiss Automatic Lathes




100
YEARS
SINCE 1916

MAIN FEATURES


- Características principais | Características principales

Palbit inserts are specially developed to suit the cutting conditions and swiss automatic lathes. Our inserts are made of micro grain carbide which results in maximum strength when considering hardness and wear resistance. All cutting edges are fully ground and exceptionally sharp. Furthermore, we have applied our latest PVD coating on these specific cutting geometries, to achieve an excellent tool life with Palbit inserts.

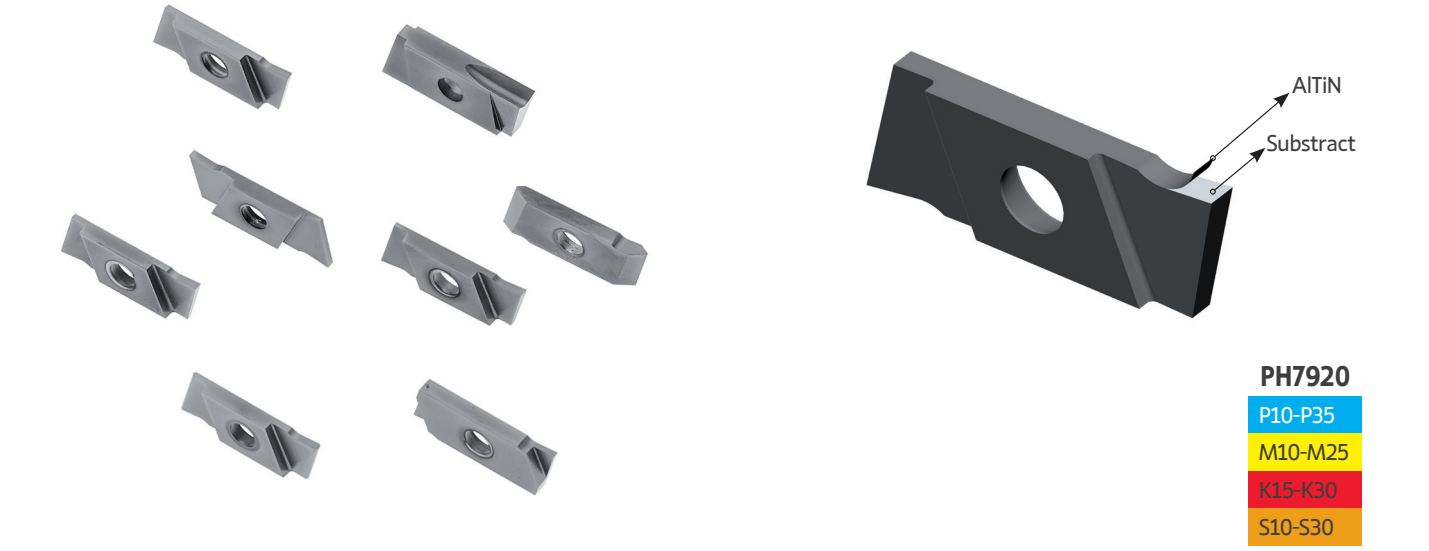

MULTIPLE INSERTS

- Multiplas pastilhas | Multiplas plaquitas

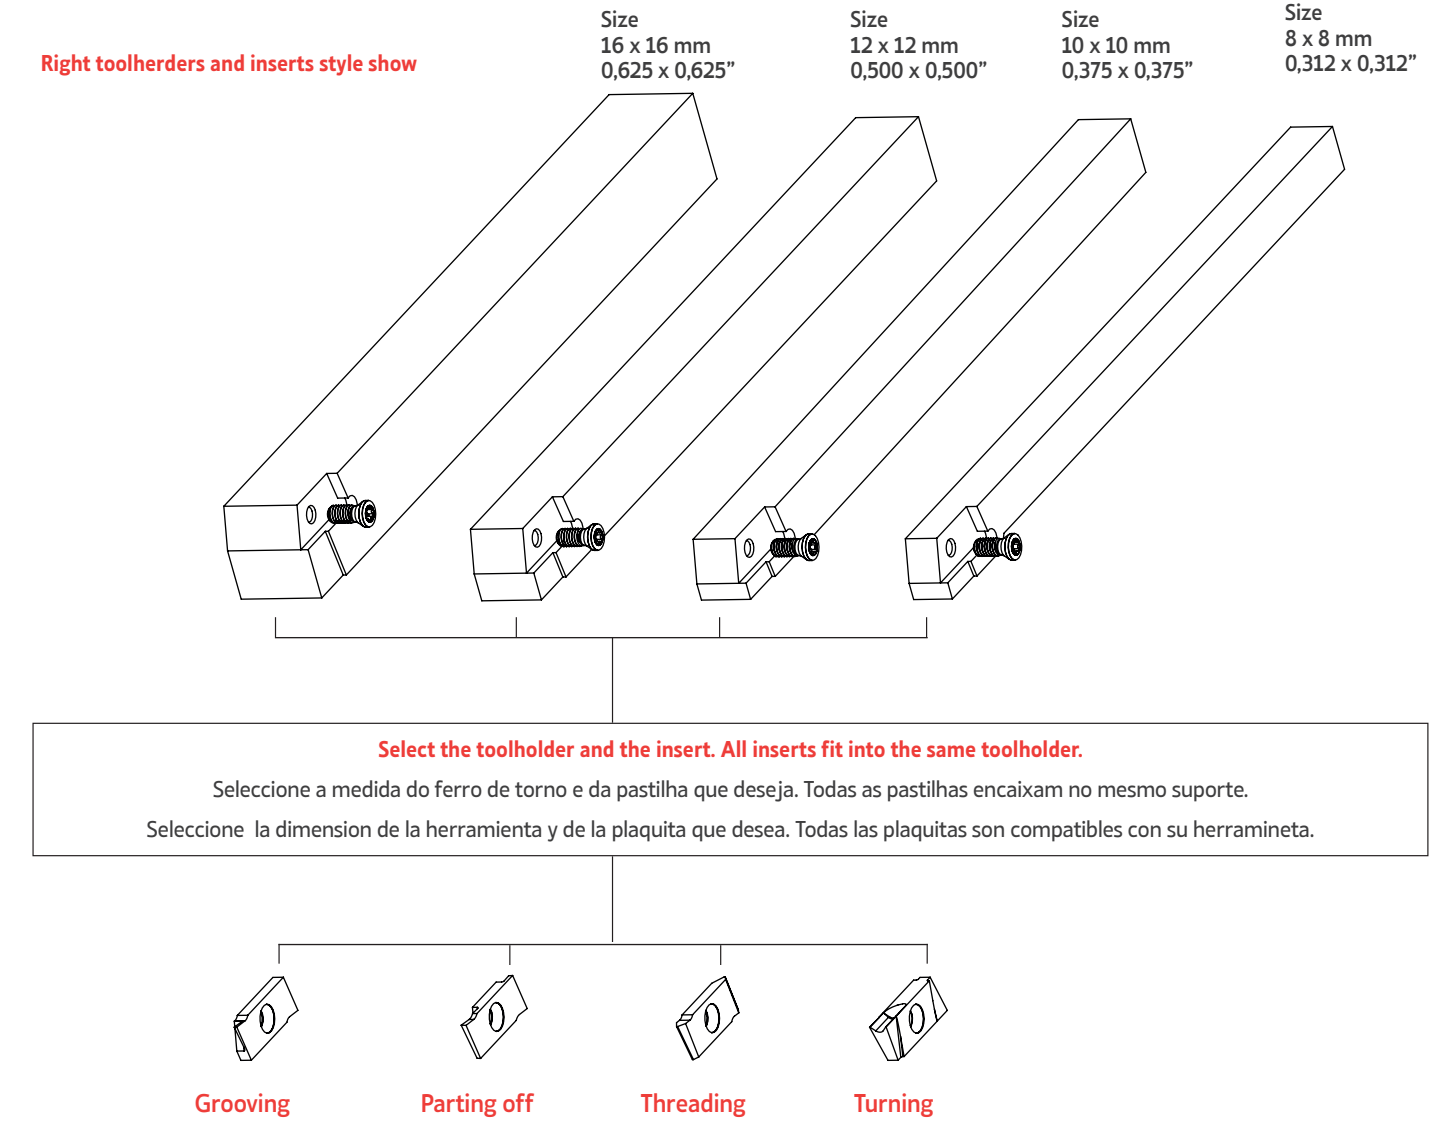

MAIN APPLICATIONS

- Características principais | Características principales

INSERTS

4 Different operations:

- Turning

- Parting off

- Grooving

- Threading

TOOLHOLDERS

Metric:

- 08x08mm

- 10x10mm

- 12x12mm

- 16x16mm

Inches:


- 0,625 x 0,625"

- 0,500 x 0,500"

- 0,375 x 0,375"

- 0,312 x 0,312"

Turning

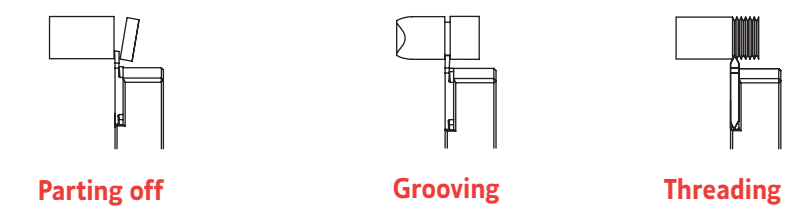

INSERTS CODE KEY - Chave de codificação para pastilhas | Llave de codificación de plaquitas

Grooving Inserts

1	2	5	6	8	-	11
SAL	25	G	050	R		GS

Parting Off Inserts

1	3	5	6	8	9	-	11
SAL	11	P	100	R	N		P07

Threading Inserts

1	4	5	7	8	10	-	11
SAL	100	H	010	R	60		PT

Turning Inserts

1	2	5	6	8	-	11	
SAL	60	T	300	R			TP

1 - Product line

SAL - Swiss Automatic Lathes Line

2 - Maximum depth of cut
(Turning and Grooving inserts)

25 - 2,5mm | 60 - 6,0mm

3 - Maximum Cutting Diameter
(Parting Off Inserts)

11 - 11,0mm | 13 - 13,0mm

4 - Center distance
(Threading Inserts)

050 - 0,5mm | 100 - 1,00mm

5 - Operations type

G - Grooving

P - Parting off

H - Threading

T - Turning

6 - Cut thickness
(Grooving, Parting Off and Turning Inserts)

050 - 0,50mm | 070 - 0,70mm | 080 - 0,80mm
090 - 0,90mm | 100 - 1,00mm | 110 - 1,10mm
130 - 1,30mm | 150 - 1,50mm | 160 - 1,60mm
185 - 1,85mm | 200 - 2,00 mm | 300 - 3,00 mm

7 - Corner radius
(Threading Inserts)

005 - 0,05mm | 010 - 0,10mm
012 - 0,12mm

8- Insert / toolholder side

L - Left hand

R - Right hand

9 - Front angle (Parting off)

N - Neutral

R - Right

L - Left

10 - Angle (Threading Inserts)

55 - 55° | 60 - 60°

11 - Chip Breaker
(Turning, Grooving, Parting Off and Threading Inserts)

Turning

Grooving

Parting Off

Threading

TP - Turning steel

GS - Square Grooving
GR - Round Grooving

P00 - Front angle 0°
P07 - Front angle 7°

PT - Partial Profile

TOOLHOLDERS CODE KEY - Chave de codificação para suportes | Llave de codificación de herramienta

For convencional Toolholders (Metric)

1	2	3	4	-	5	6	-	7	8
SAL	H	E	R		08	08		M	07

For Convencional Toolholders (Imperial)

1	2	3	4	-	8	9
SAL	H	E	L		07	05

1 - Product line

SAL - Swiss Automatic Lathes Line

2 - Tool type

H - Holder

3 - Internal or External

E - External

4 - Insert / toolholder side

L - Left hand

R - Right hand

5 - Shank height (Metric)

Metric

08 - 8 mm

10 - 10 mm

12 - 12 mm

16 - 16 mm

6 - Shank widht (Metric)

Metric

08 - 8 mm

10 - 10 mm

12 - 12 mm

16 - 16 mm

7 - Shank height (Metric or Imperial)

L - 140 mm

M - 150 mm

8 - Insert cutting edge lenght (mm)

07 - 7,0 mm

9 - Shank height (Imperial)

Imperial

05 - 5/16'' x 5/16''


06 - 3/8'' x 3/8''

08 - 1/2'' x 1/2''

10 - 5/8'' x 5/8''

EXTERNAL TOOLHOLDERS


Suportes exteriores | herramientas de tronzado exterior

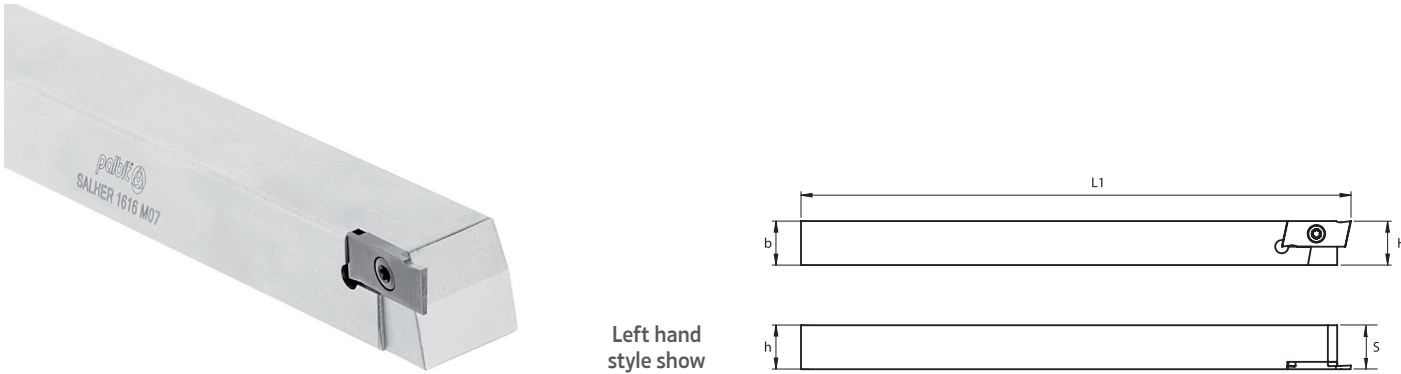

Order code Código	Reference Referência Referencia	Dimensions Dimensões Dimensiones (mm)					* Insert	Screw	Wrench	Stock
		h	b	H	L1	S				
Metric										
213023600	SALHEL 0808 M07	8,000	8,000	8,000	150,00	8,000	SAL...L	P0300900	XT 08	
213023700	SALHEL 1010 M07	10,000	10,000	10,000	150,00	10,000	SAL...L	P0300900	XT 08	
213023800	SALHEL 1212 M07	12,000	12,000	12,000	150,00	12,000	SAL...L	P0300900	XT 08	
213023900	SALHEL 1616 M07	16,000	16,000	16,000	150,00	16,000	SAL...L	P0300900	XT 08	
Imperial										
213024700	SALHEL 05-07	0,312	0,312	0,312	6,00	0,312	SAL...L	P0300900	XT 08	
213024800	SALHEL 06-07	0,375	0,375	0,375	6,00	0,375	SAL...L	P0300900	XT 08	
213024900	SALHEL 08-07	0,500	0,500	0,500	6,00	0,500	SAL...L	P0300900	XT 08	
213025000	SALHEL 10-07	0,625	0,625	0,625	6,00	0,625	SAL...L	P0300900	XT 08	

Stock item | Itens de stock

* Left insert only fits on left toolholder

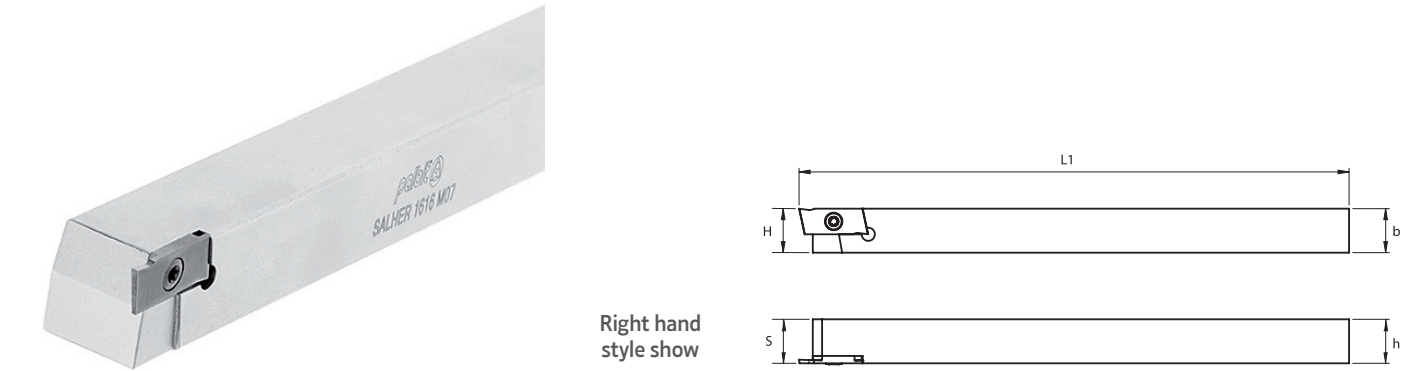


Order code Código	Reference Referência Referencia	Dimensions Dimensões Dimensiones (mm)					* Insert	Screw	Wrench	Stock
		h	b	H	L1	S				
Metric										
213023200	SALHER 0808 M07	8,000	8,000	8,000	150,00	8,000	SAL...R	P0300900	XT 08	
213023300	SALHER 1010 M07	10,000	10,000	10,000	150,00	10,000	SAL...R	P0300900	XT 08	
213023400	SALHER 1212 M07	12,000	12,000	12,000	150,00	12,000	SAL...R	P0300900	XT 08	
213023500	SALHER 1616 M07	16,000	16,000	16,000	150,00	16,000	SAL...R	P0300900	XT 08	
Imperial										
213024300	SALHER 05-07	0,312	0,312	0,312	6,00	0,312	SAL...R	P0300900	XT 08	
213024400	SALHER 06-07	0,375	0,375	0,375	6,00	0,375	SAL...R	P0300900	XT 08	
213024500	SALHER 08-07	0,500	0,500	0,500	6,00	0,500	SAL...R	P0300900	XT 08	
213024600	SALHER 10-07	0,625	0,625	0,625	6,00	0,625	SAL...R	P0300900	XT 08	

Stock item | Itens de stock

* Right insert only fits on right toolholder

GS SERIES

Inserts | Pastilhas | Plaquetas

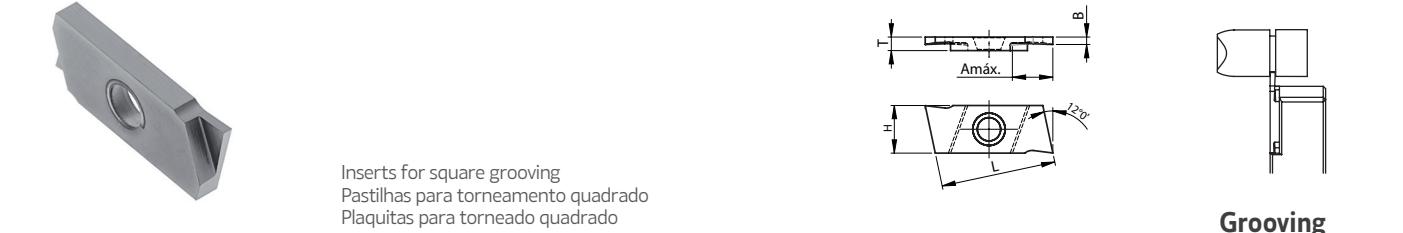

	(2) Grade code		P		M		K		S		Dimensions (mm) Dimensões (mm) Dimensiones (mm)							Cutting conditions Condições de corte Condiciones de corte		
			PVD																	
			G1	G4	G4	P8	G4	P8	G4	P8										
(1)	ISO Reference	ANSI Reference	PH7910	PH7920	PH7920	PH7135	PH7920	PH7135	PH7920	PH7135	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
Geometry code																				
1130441	SAL25G050R-GS	SAL25G050R-GS									0,50	17,00	2,00	7,00	2,50	-	-	0,04	0,02	0,06
1130475	SAL25G070R-GS	SAL25G070R-GS									0,70	17,00	2,00	7,00	2,50	-	-	0,05	0,02	0,08
1130477	SAL25G080R-GS	SAL25G080R-GS									0,80	17,00	2,00	7,00	2,50	-	-	0,05	0,02	0,09
1130479	SAL25G090R-GS	SAL25G090R-GS									0,90	17,00	2,00	7,00	2,50	-	-	0,06	0,02	0,10
1130488	SAL60G110R-GS	SAL60G110R-GS									1,10	17,00	2,00	7,00	6,00	-	-	0,06	0,02	0,11
1130490	SAL60G130R-GS	SAL60G130R-GS									1,30	17,00	2,00	7,00	6,00	-	-	0,07	0,02	0,12
1130442	SAL60G160R-GS	SAL60G160R-GS									1,60	17,00	2,00	7,00	6,00	-	-	0,07	0,02	0,13
1130495	SAL60G185R-GS	SAL60G185R-GS									1,85	17,00	2,00	7,00	6,00	-	-	0,08	0,02	0,14
1130473	SAL25G050L-GS	SAL25G050L-GS									0,50	17,00	2,00	7,00	2,50	-	-	0,04	0,02	0,06
1130474	SAL25G070L-GS	SAL25G070L-GS									0,70	17,00	2,00	7,00	2,50	-	-	0,05	0,02	0,08
1130476	SAL25G080L-GS	SAL25G080L-GS									0,80	17,00	2,00	7,00	2,50	-	-	0,05	0,02	0,09
1130478	SAL25G090L-GS	SAL25G090L-GS									0,90	17,00	2,00	7,00	2,50	-	-	0,06	0,02	0,10
1130487	SAL60G110L-GS	SAL60G110L-GS									1,10	17,00	2,00	7,00	6,00	-	-	0,06	0,02	0,11
1130489	SAL60G130L-GS	SAL60G130L-GS									1,30	17,00	2,00	7,00	6,00	-	-	0,07	0,02	0,12
1130493	SAL60G160L-GS	SAL60G160L-GS									1,60	17,00	2,00	7,00	6,00	-	-	0,07	0,02	0,13
1130494	SAL60G185L-GS	SAL60G185L-GS									1,85	17,00	2,00	7,00	6,00	-	-	0,08	0,02	0,14

Stock item
produto de stock
Itens de stock

Available under request with delivery time 2 weeks
Disponível sobre consulta com prazo de entrega de 2 semanas
Disponible bajo consulta, con fecha de entrega de 2 semanas

Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

GR SERIES

Inserts | Pastilhas | Plaquetas




	(2) Grade code		P		M		K		S		Dimensions (mm) Dimensões (mm) Dimensiones (mm)							Cutting conditions Condições de corte Condiciones de corte		
			PVD																	
			G1	G4	G4	P8	G4	P8	G4	P8	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
(1) Geometry code	ISO Reference	ANSI Reference	PH7910	PH7920	PH7920	PH7135	PH7920	PH7135	PH7920	PH7135	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
1130443	SAL60G100R-GR	SAL60G100R-GR	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	-	-	0,06	0,02	0,10
1130492	SAL60G150R-GR	SAL60G150R-GR	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	-	-	0,08	0,02	0,12
1130497	SAL60G200R-GR	SAL60G200R-GR	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	-	-	0,08	0,03	0,14
1130486	SAL60G100L-GR	SAL60G100L-GR	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	-	-	0,06	0,02	0,10
1130491	SAL60G150L-GR	SAL60G150L-GR	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	-	-	0,08	0,02	0,12
1130496	SAL60G200L-GR	SAL60G200L-GR	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	-	-	0,08	0,03	0,14

Stock item
produto de stock
Itens de stock

Available under request with delivery time 2 weeks
Disponível sobre consulta com prazo de entrega de 2 semanas
Disponible bajo consulta, con fecha de entrega en 2 semanas


Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

P(P00) SERIES || Inserts | Pastilhas | Plaquetas



Right hand style show

Without front angle
Sem ângulo frontal
Sin ángulo frontal



Parting off

(1) Geometry code	(2) Grade code		PVD								Dimensions (mm) Dimensões (mm) Dimensiones (mm)						Cutting conditions Condições de corte Condiciones de corte			
			PVD																	
			G1	G4	G4	P8	G4	P8	G4	P8	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
1130444	SAL11P100RN-P00	SAL11P100RN-P00	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	0	11,00	0,06	0,02	0,10
1130462	SAL11P150RN-P00	SAL11P150RN-P00	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	0	11,00	0,08	0,02	0,12
1130468	SAL13P200RN-P00	SAL13P200RN-P00	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	0	13,00	0,08	0,03	0,14
1130456	SAL11P100LN-P00	SAL11P100LN-P00	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	0	11,00	0,06	0,02	0,10
1130459	SAL11P150LN-P00	SAL11P150LN-P00	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	0	11,00	0,08	0,02	0,12
1130465	SAL13P200LN-P00	SAL13P200LN-P00	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	0	13,00	0,08	0,03	0,14

⊗ Stock item
produto de stock
Ítems de stock

○ Available under request with delivery time 2 weeks
Disponível sobre consulta com prazo de entrega de 2 semanas
Disponible bajo consulta, con fecha de entrega en 2 semanas


Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

PT SERIES || Inserts | Pastilhas | Plaquetas



Right hand style show

For partial profile Threading
Para perfil parcial de roscagem
Para perfil parcial de roscado



Threading


(1) Geometry code	(2) Grade code		PVD								Dimensions (mm) Dimensões (mm) Dimensiones (mm)						Cutting conditions Condições de corte Condiciones de corte			
			PVD																	
			G1	G4	G4	P8	G4	P8	G4	P8	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
1130472	SAL100H012R55-PT	SAL100H012R55-PT	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	0,12	55	-	0,80	0,20	2,00
1130447	SAL100H012R60-PT	SAL100H012R60-PT	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	0,12	60	-	0,80	0,20	2,00
1130470	SAL100H012L55-PT	SAL100H012L55-PT	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	0,12	55	-	0,80	0,20	2,00
1130471	SAL100H012L60-PT	SAL100H012L60-PT	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	0,12	60	-	0,80	0,20	2,00

⊗ Stock item
produto de stock
Ítems de stock

○ Available under request with delivery time 2 weeks
Disponível sobre consulta com prazo de entrega de 2 semanas
Disponible bajo consulta, con fecha de entrega en 2 semanas


Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

TP SERIES || Inserts | Pastilhas | Plaquetas



Right hand style show

For turning
Para torneamento
Para torneado



Turning


(1) Geometry code	(2) Grade code		PVD								Dimensions (mm) Dimensões (mm) Dimensiones (mm)						Cutting conditions Condições de corte Condiciones de corte			
			PVD																	
			G1	G4	G4	P8	G4	P8	G4	P8	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
1130501	SAL60T300R-TP	SAL60T300R-TP	○	⊗	⊗	○	⊗	○	⊗	○	-	17,00	3,17	7,00	6,00	-	-	0,08	0,02	0,12
1130499	SAL60T300L-TP	SAL60T300L-TP	○	⊗	⊗	○	⊗	○	⊗	○	-	17,00	3,17	7,00	6,00	-	-	0,08	0,02	0,12

⊗ Stock item
produto de stock
Ítems de stock

○ Available under request with delivery time 2 weeks
Disponível sobre consulta com prazo de entrega de 2 semanas
Disponible bajo consulta, con fecha de entrega en 2 semanas


Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

P(P07) SERIES || Inserts | Pastilhas | Plaquetas



Right hand style show

Front angle 7°
Ângulo frontal de 7°
Ángulo frontal de 7°



Parting off


(1) Geometry code	(2) Grade code		PVD								Dimensions (mm) Dimensões (mm) Dimensiones (mm)						Cutting conditions Condições de corte Condiciones de corte			
			PVD																	
			G1	G4	G4	P8	G4	P8	G4	P8	B	L	T	H	Amáx.	V°	Ømáx.	fn (mm/r)	Min.	Max.
1130445	SAL11P100RR-P07	SAL11P100RR-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	7	11,00	0,05	0,02	0,08
1130446	SAL11P100RL-P07	SAL11P100RL-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	7	11,00	0,05	0,02	0,08
1130463	SAL11P150RR-P07	SAL11P150RR-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	7	11,00	0,06	0,02	0,10
1130461	SAL11P150RL-P07	SAL11P150RL-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	7	11,00	0,06	0,02	0,10
1130469	SAL13P200RR-P07	SAL13P200RR-P07	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	7	13,00	0,06	0,03	0,12
1130467	SAL13P200RL-P07	SAL13P200RL-P07	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	7	13,00	0,06	0,03	0,12
1130457	SAL11P100LR-P07	SAL11P100LR-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	7	11,00	0,05	0,02	0,08
1130455	SAL11P100LL-P07	SAL11P100LL-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,00	17,00	2,00	7,00	6,00	7	11,00	0,05	0,02	0,08
1130460	SAL11P150LR-P07	SAL11P150LR-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	7	11,00	0,06	0,02	0,10
1130458	SAL11P150LL-P07	SAL11P150LL-P07	○	⊗	⊗	○	⊗	○	⊗	○	1,50	17,00	2,00	7,00	6,00	7	11,00	0,06	0,02	0,10
1130466	SAL13P200LR-P07	SAL13P200LR-P07	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	7	13,00	0,06	0,03	0,12
1130464	SAL13P200LL-P07	SAL13P200LL-P07	○	⊗	⊗	○	⊗	○	⊗	○	2,00	17,00	2,00	7,00	6,00	7	13,00	0,06	0,03	0,12

⊗ Stock item
produto de stock
Ítems de stock

○ Available under request with delivery time 2 weeks
Disponível sobre consulta com prazo de entrega de 2 semanas
Disponible bajo consulta, con fecha de entrega en 2 semanas

Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

BLANKS FOR GRIDING || Blanks para personalizar | Blanks para personalizar



Right hand style show

Inserts blanks “do it yourself” griding are available allowing modifications of the insert for any machining operation.

As pastilhas de blank “faça você mesmo” permitem a personalização da pastilha para qualquer operação de maquinação.

Las plaquetas de blank “haga usted mismo” permiten la personalización de la plaqueta para cualquiera operación de maquinación.

(1) Geometry code	(2) Grade code		Uncoated			Dimensions (mm) Dimensões (mm) Dimensiones (mm)					
			10	12	14						
			PH0910	PH0920	PH0135	B	L	T	H	Amáx.	V°
1130440	BLANK SALR 17x7x2	⊗	⊗	⊗	-	17,50	2,00	7,50	-	-	-
1130504	BLANK SALR 17x7x3,17	⊗	⊗	⊗	-	17,50	3,17	7,50	-	-	-
1130453	BLANK SALL 17x7x2	⊗	⊗	⊗	-	17,50	2,00	7,50	-	-	-
1130505	BLANK SALL 17x7x3,17	⊗	⊗	⊗	-	17,50	3,17	7,50	-	-	-


⊗ Stock item
produto de stock
Ítems de stock

Order code = (1) Geometry code + (2) Grade code
Código = (1) Código de geometria + (2) Código de calidad

GROOVING

Canais | Ranurado

- High precision
- Close tolerances
- Wide variety of insert widths

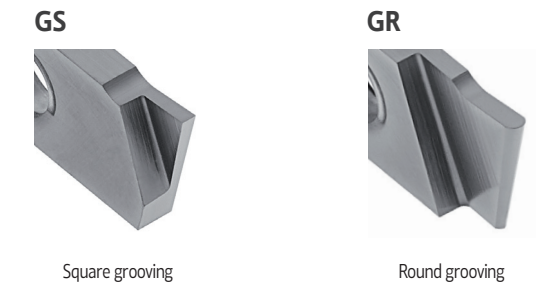

Recomended cutting conditions

P	M	K	S
60-200	60-180	60-150	20-50


Recomended grade PH7920, (Vc) m/min.

Grade PH7910 and PH7135
Available under request (2 weeks delivery time)

PARTING OFF

Corte | Tronzado

- When parting off with a sub-spindle, it is more productive to use a straight cutting edge. This is a more stable parting method and will generate the best surface finish.
- When parting off without a sub-spindle, we recommend you use an insert with a maximum 7° front angle to minimize the risk of burr and pips on the component.
- When parting off with 7° front angled inserts, we recommend reducing the feed rate by approximately 30%.

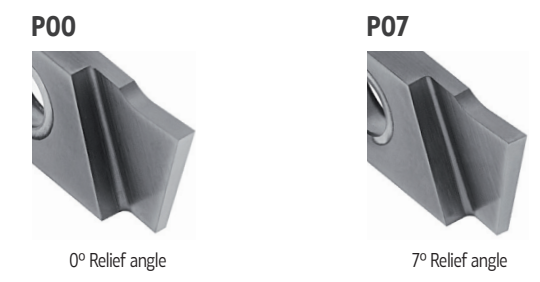

Recomended cutting conditions

P	M	K	S
60-200	60-180	60-150	20-50

Recomended grade PH7920, (Vc) m/min.

Grade PH7910 and PH7135
Available under request (2 weeks delivery time)

THREADING

Roscagem | Roscado

Two types of threading:

- Partial profile 55°
- Partial profile 60°



Recomended cutting conditions

P	M	K	S
60-200	60-180	60-150	20-50

Recomended grade PH7920, (Vc) m/min.

Grade PH7910 and PH7135
Available under request (2 weeks delivery time)

TURNING

Torneamento | Torneado

- Insert for turning
- Maximum deep of cut is 3,00 mm
- Too low cutting speed will result in inadequate tool life and it is advisable to follow cutting speed recommendations.





Recomended cutting conditions

P	M	K	S
60-200	60-180	60-150	20-50


Recomended grade PH7920, (Vc) m/min.

Grade PH7910 and PH7135
Available under request (2 weeks delivery time)

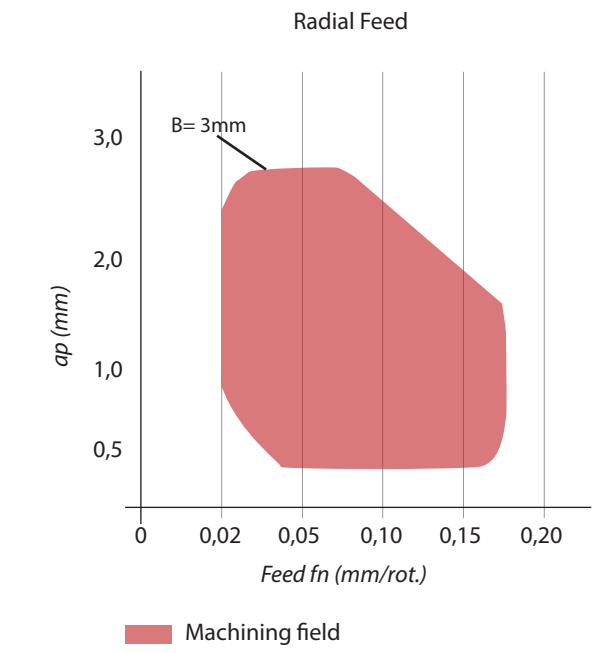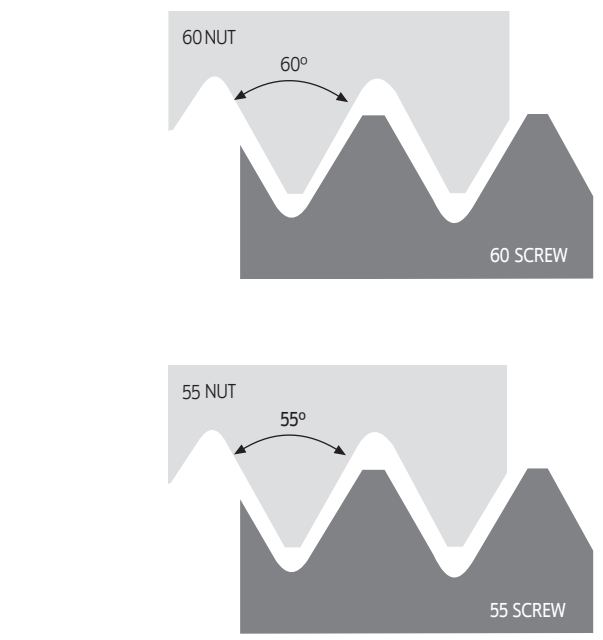


TEST REPORT 01



P00



0° Front angle



Parting off

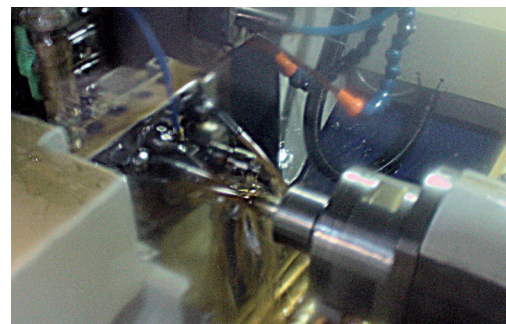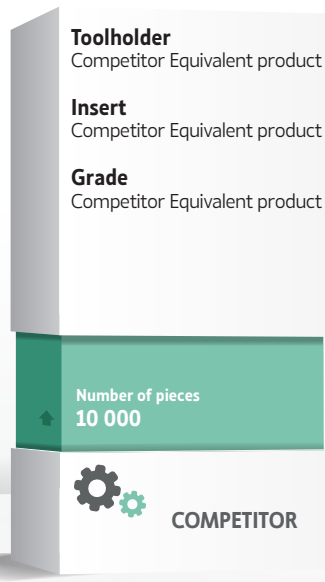


Work material: AISI 316


Cutting speed: Vc (m/min)	100
Feed per tooth: fn (mm/r)	0,08
Diameter (mm)	10
Machining method	Parting off
Coolant	Yes

TEST REPORT 02



GS



Insert for square grooving



Grooving

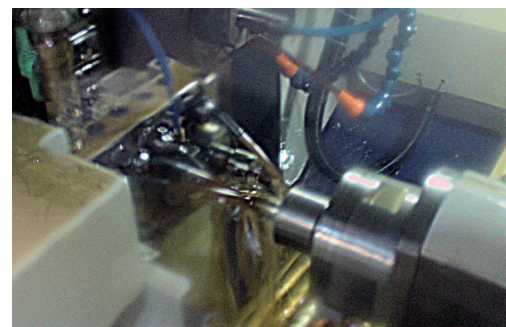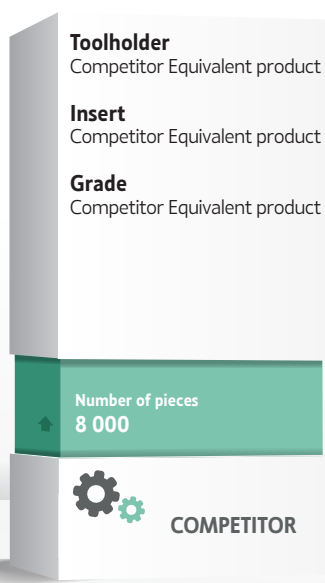

Work material: 34CrNiMo6

Cutting speed: Vc (m/min)	120
Feed per tooth: fn (mm/r)	0,05
Diameter (mm)	8
Machining method	Grooving
Coolant	Yes